


The MIMCT-7D Series Digital Transducer for Industrial Low Pressure I²C & SPI Protocols

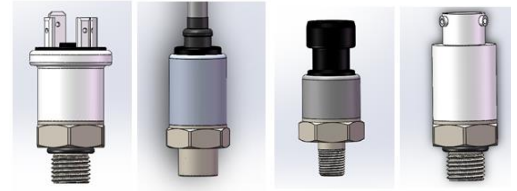

DESCRIPTION

Advanced Sensors Media Isolated Multi Chip Technology (MIMCT) 7D Series incorporates the latest mixed signal ASIC (Application Specific Integrated Circuit) with an oil isolated silicon gage to provide the standard for Industrial Transducers & Transmitters. The MIMCT 7D Series leading Digital Output design provides a 14bit digital pressure and 11-bit digital temperature output offered in SPI and I²C protocols. The rugged design is compatible with a wide range of harsh media including refrigerants, compressed air, and hydraulic fluids. The design's superior performance provides 1% Total Error across a wide temperature range of -20 to 85°C and overall error of less than 2.5% over -40 to 125°C. The flexible design incorporates many process fitting and connector types making it the ideal choice for OEM customers.

APPLICATIONS

- Hydraulic and Pneumatic
- Rooftop Chillers
- Pumps and Compressors
- Refrigeration Systems
- Energy and Water Management

FEATURES

- Media (Oil) Isolated Silicon Gage
- Low to Medium Pressure
- Flexible Electrical Outputs
- ASIC Compensation
- Wide Temperature Range
- Stainless Steel Process Ports
- High Accuracy
- Low Overall Errors, 1%TEB
- All Welded Design
- Custom Outputs and Ranges Available

SPECIFICATIONS


	Symbol	Min	Typical	Max	Unit	Note
Performance Specifications						
Supply Voltage		2.7V	3.3	5.50	V	
Current Consumption				3	mA	
Pressure Resolution				14	bits	
Temperature Resolution				11	bits	
Output at Pmin			1638		cts	
Output at Pmax			14746		cts	
Span	FSS		13107		cts	
Pressure Accuracy		-0.25		0.25	%FSS	2
Total Error Band	TEB	-1.0		1.0	%FSS	3
Temperature Accuracy			2.5		°C	
Long Term Stability			±0.4		%FSS	
Conversion Time			1.0		mS	4
Power On to Valid Data				<10	mS	5
Life		1kk			cycles	
Weight				120	grams	
Compensated Temperature			-20 to 85		°C	
Operating Temperature			-40 to 125		°C	

SPECIFICATIONS	Symbol	Min	Typical	Max	Unit	Note
Absolute Maximum Conditions						6
Supply Voltage		-16		16	V	
Storage Temperature		-50		150	°C	
Burst Pressure				3x	Range	
Insulation Resistance		10			MΩ	500Vdc
Wetted Materials		316L, Epoxy, Silicon				


Reference Conditions: Vsupply: 3.30Vdc or 5.00, Ta=25 °C.

1. All specification at reference conditions unless otherwise noted. Output is ratio metric to supply voltage.
2. Maximum deviation from a Best Fit Straight Line through Pmin and Pmax measured at 25 °C. Errors included Pressure Non Linearity, Pressure Hysteresis and Repeatability.
3. Maximum deviation from the Ideal Transfer Function expressed as a percentage of the %FSS over the compensated temperature range. Includes calibration errors (Offset & Span), temperature errors (Offset & Span), pressure non-linearity, pressure and thermal hysteresis.
4. The time for the output DAC to be updated with new data.
5. The time for the output DAC to have valid data after a power on reset.
6. Exceeding Absolute Maximum Specification may damage the device. Extended exposure beyond the operating conditions may affect device reliability.
7. Low Power Option will set the standby current to ~0.6uA at room temperature.

PRESSURE AND TEMPERATURE TRANSFER FUNCTIONS

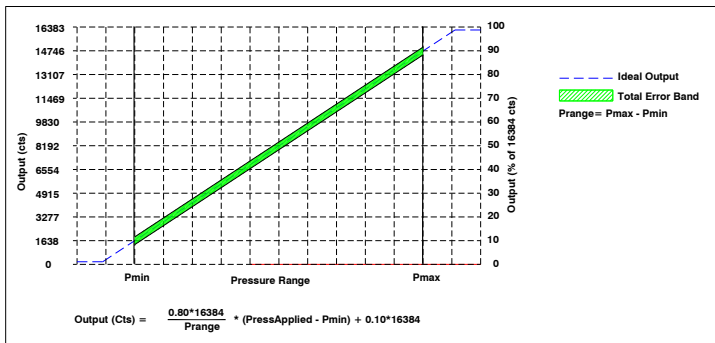

Pressure Transfer Function, TEB Error

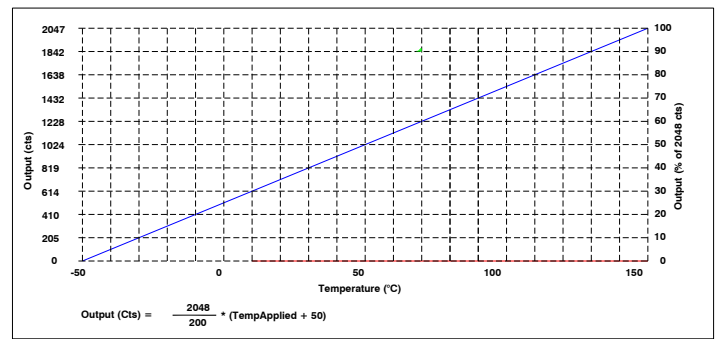

Temperature Transfer Function

CONSTRUCTION

Material

Wetted	
Port & Diaphragm	316L Stainless Steel
External	
MEMS Sense Element	Glass, Silicon
Sensor Die Bond	Silicone RTV
Housing Tube	303 Stainless Steel
Connector	PBT Glass Filled
Cable Jacket	TPE
Transfer Fluid, Media Isolation	Silicon Oil

MECHANICAL DIMENSIONS in [mm]

M12x1 IEC 61076-2-101, Binder 09 0439 387 04 Protection Class (IEC 60529): IP67


Mating M12x1 Connector
4 Position Female Type D

Voltage
Regulated, Ratiometric

Pin 1: Supply +
Pin 4: Output +
Pin 3: Common

4-20mA
Transmitter

Pin 1: Supply +
Pin 4: Not Connected
Pin 3: Supply -

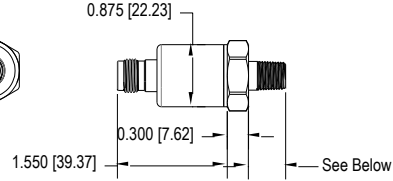

PACKARD CONNECTOR Type A

Protection Class (IEC 60529): IP66



Mating Packard Connector
Housing Part Number: 12078590
Socket Part Number: 12103881

Voltage
Regulated, Ratiometric

Pin A: Supply +
Pin B: Common
Pin C: Output +

4-20mA
Transmitter

Pin A: Supply +
Pin B: Supply +
Pin C: Not Connected

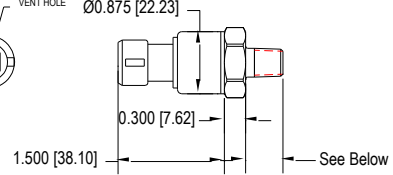

HIRSCHMANN CONNECTOR DIN 43650 FORM A, Part Number 933 376-100

Protection Class (IEC 60529): IP65




Mating Hirschmann Connector
Part Number: 931 969-100
Gasket (NBR) Part Number: 730 801-002
Knurled Screw Part Number: 732 574-001

Voltage
Regulated, Ratiometric

Pin 1: Supply +
Pin 2: Common
Pin 3: Output +
Pin 4: Case

4-20mA
Transmitter

Pin 1: +Supply
Pin 2: -Supply
Pin 3: Not Connected
Pin 4: Case

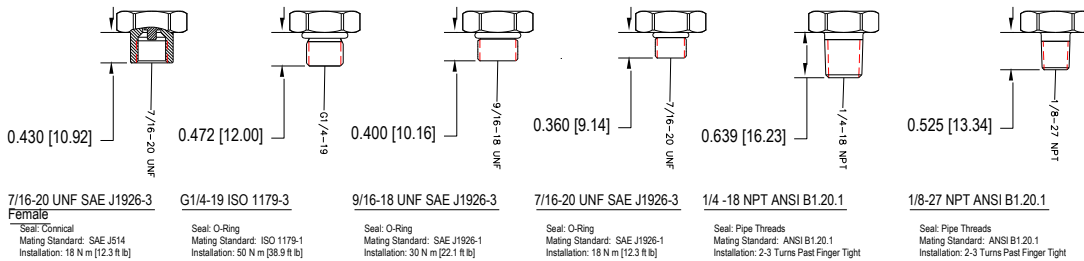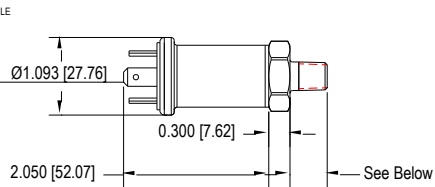


HIRSCHMANN CONNECTOR

DIN 43650 FORM C, Part Number 933 114-100

Protection Class (IEC 60529): IP65

Mating Hirschmann Connector

Part Number: 933 024-100
Gasket (NBR) Part Number: Supplied




Voltage Regulated, Ratiometric

Pin 1: Supply+
Pin 2: Common
Pin 3: Output+
Pin 4: Case

4-20mA Transmitter

Pin 1: -Supply
Pin 2: -Supply
Pin 3: Not Connected
Pin 4: Case

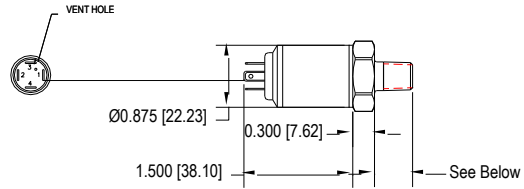


BENDIX CONNECTOR

MIL-C-26482, Part Number PT02A-10

Protection Class (IEC 60529): IP65

Mating Bendix Connector

Part Number: PT06A-10-6S




Voltage Regulated, Ratiometric

Pin A: Supply+
Pin B: Output+
Pin C: Common
Pin D: Common
Pin E: Not Connected
Pin F: Vent

4-20mA Transmitter

Pin A: B: Supply+
Pin C: D: Supply
Pin E: Not Connected
Pin F: Vent

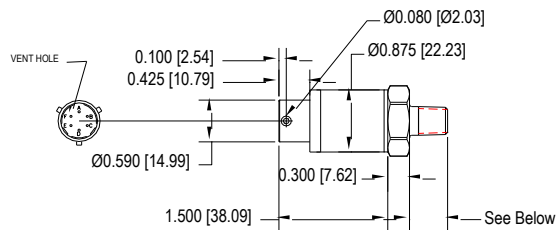

Digital I2C / SPI

Pin A: Supply+
Pin B: SDA/MISO
Pin C: Supply
Pin D: SCK/SCLK
Pin E: SS/INT
Pin F: Vent

FLYING LEADS

300 V Overall Foil Shield
Multiconductor, PVC, PVC

Protection Class (IEC 60529): IP65

Voltage Regulated, Ratiometric



RED: Supply+
GRN: Output+
WHT: No Connection
BLK: Common

Digital I2C / SPI

RED: Supply+
BROWN: SDA/MISO
YELLOW: Supply
GREEN: SCK/SCLK
PINK: SS/INT

4-20mA Transmitter

RED: Supply+
BLK: Supply

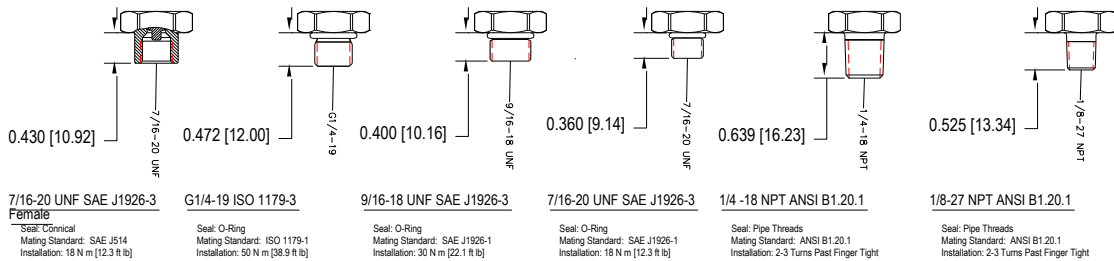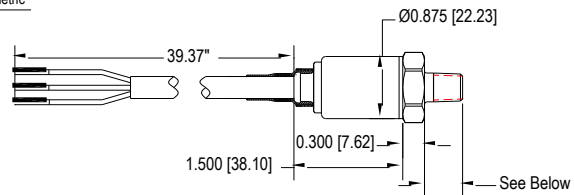

Options

-ZSP Zero & Span Potentiometer

R5= Span Adjustment

R4= Zero Adjustment

R6= Factory (Do Not
Adjust)



-MHC Mating Hirschman Connector

Product is shipped with
GDM 3009 Mating
Connector



PART NUMBERING FOR ORDERS

Series	Port Type	Pressure range (psi)	Pressure Units	Pressure Type (Range Availability) [Package Availability]	Calibrated Voltage	Digital Protocol	Electrical Connection	Options	
MIMCT-7D	N1 = 1/8 -27 NPT N2 = 1/4-18NPT S1 = 7/16-20UNF S2 = 9/16-18UNF G1 = G1/8 F1 =Female, 7/16-20UNF	0100	L=millibar	G= Gage (All Ranges) [All Port Types] A=Absolute (All Ranges) [All Port Types]	3=3.3Vdc 5-5.0Vdc	I1=I2C, 0x28H I2=I2C, 0x38H I3=I2C, 0x48H S1=SPI Protocol	M1=Micro M12 P2=Packard, Power B HA=Hirschmann Form A HC=Hirschmann Form C B1=Bendix F1=Flying leads, 1 Meter Fx=Flying leads, x=#of Meter	-L Low Power (See Note 7) -ZSP Zero & Span Potentiometers -MHC Mating Hirschmann Connector	
		0200							
		0300							
		0400							
		0500							
		0002							P=PSI
		0005							
		0010							
		0015							
		0030							
		0050							
		0100							
0150									
0300									
0500									
05.0	B=Bar								
10.0									
16.0									
25.0									
40.0									
0.50	M=mPa								
1.00									
1.60									
2.50									
4.00									

Part Number Example: **MIMCT-7D N116.0BG3IP1**

1/8NPT, 0-16Bar , Gage, 3.3Vdc, I2c Protocol, Packard Connector, Pmin=0, Pmax=16Bar

WARRANTY

Pressure sensors have a limited one-year warranty to the original purchaser. AVSensors will repair or replace, at its option, without charge those items it finds defective. This is the buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall AVSensors be liable for consequential, special, or indirect damages. This warranty does not apply to units that have been modified, misused, neglected or installed where the application exceeds published ratings. Specifications may change without notice. The information supplied is believed to be accurate and reliable as of this printing, however, we assume no responsibility for its use.