

MIOF-19C Series
Media Isolated, Oil Filled, 19mm
mV Output, Temperature Compensated
Constant Voltage Supply



DESCRIPTION

Advanced Sensor MIOF-19C Series sensor is a media isolated pressure sensor designed for corrosive gases and liquids compatible with stainless 316L. The sensor design utilizes silicon oil to transfer pressure from the 316L diaphragm to the sensing element. The rugged design is compatible with a wide range of harsh media including refrigerants, compressed air, and hydraulic fluids. The design's superior performance provides low thermal errors across a wide temperature range of -10 to 70°C.

Available in gage and absolute pressures with a flexible o-ring pressure port these sensors are ideal for OEM customer with ranges up to 500psi.

APPLICATIONS

- Process Controls
- Waste Water Measurements
- Medical equipment/instrumentation
- Pressure Transmitters
- Environmental controls
- Pneumatic controls

FEATURES

- Compatible with Corrosive media
- High Level Signal Output
- Wide selection of ports
- Absolute or Gage pressures
- Temperature Compensated
- Linear High Output

SPECIFICATIONS

	Symbol	Min	Typical	Max	Unit	Note
Performance Characteristic (PSI Ranges)						
Supply Voltage			10.00		V	
Bridge Resistance, Input		8.0		50.0	kΩ	
Bridge Resistance, Output		3.0		6.0	kΩ	
Zero Pressure Offset			±1.0	±2.0	mV	
Pressure Non Linearity		-0.25		+0.25	%FSS	
Pressure Hysteresis & Repeatability			±0.10		%FSS	
Full Scale Span	FSS	98		102	mV	
Temperature Hysteresis, Offset & Span		-	±0.1	±0.3	%FSS	
Thermal Error of Span				±1.0	%FSS	3
Thermal Error of Offset				±1.0	%FSS	3
Response Time			100		μS	
Insulation Resistance		100			M Ω	4
Long Term Stability, Offset & Span			±0.2	±0.3	%FSS	5
Compensated Temperature			0 to 80		°C	
Operating Temperatures			-40 to 125		°C	


SPECIFICATIONS	Symbol	Min	Typical	Max	Unit	Note
Absolute Maximum Conditions						6
Supply Voltage				14	Vdc	
Storage Temperature		-50		150	°C	
Overage Pressure				3x	Range	
Media Compatibility		Liquids and Gases compatible with 316L Stainless Steel				

Reference Conditions: Vsupply: 10.00 Vdc, Ta=25°C. Pressure applied to top side of pressure port.

1. All specification at reference conditions unless otherwise noted. Output is ratio metric to supply voltage.
2. ½ Terminal Base Non Linearity (Measured at 0, 50% and 100% FS) measured from front side.
3. Deviation over compensated temperature range expressed as percentage of reading at 25°C.
4. Measured between case and any output pin.
5. Deviation after 1 year period measured at reference conditions.
6. Exceeding Absolute Maximum Specification may damage the device. Extended exposure beyond the operating conditions may affect device reliability.

MECHANICAL DIMENSIONS Units=mm

Ribbon Cable Connection

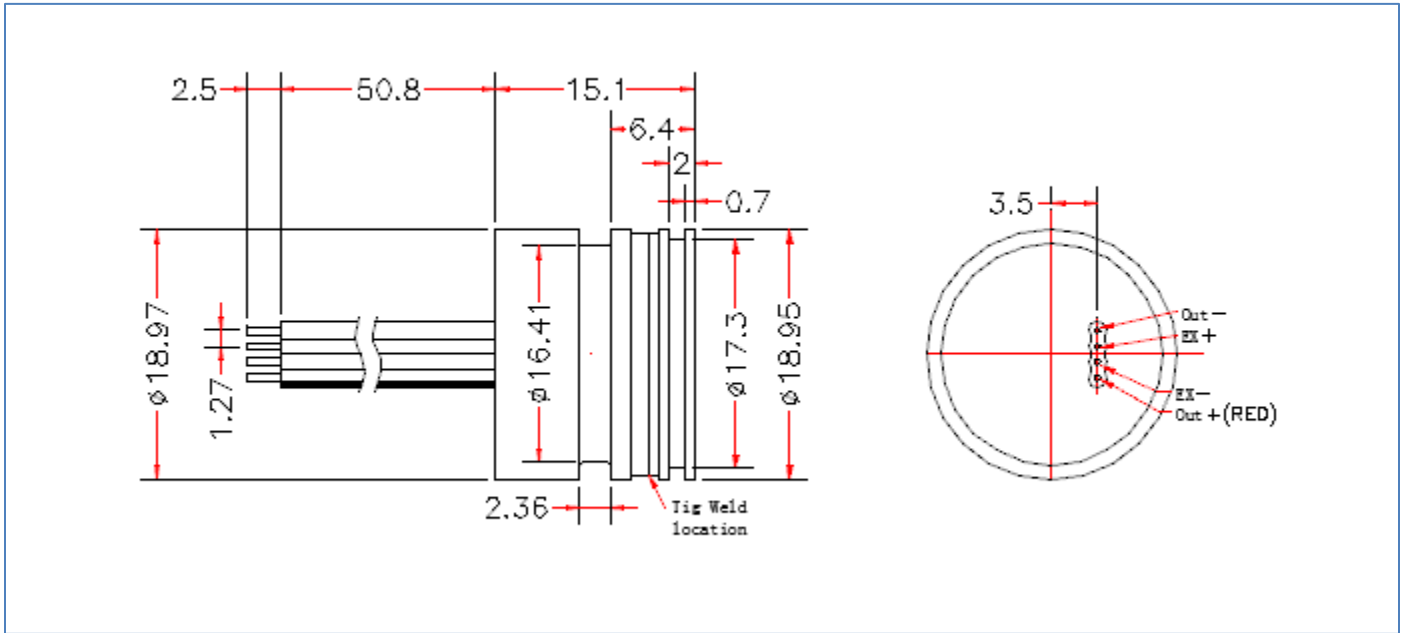

Standard Connection, Pins

PART NUMBERING FOR ORDERS

Series	Port Style	Pressure Range	Pressure Units	Pressure Type (Range Availability) [Package Availability]	Electrical Source	Electrical Connector
MIOF-19C	P8=Euro O-Ring P9=1/4 VCR wit female Nut	1.0 1.6 2.5 4.0 7.0	M=mpA	G=Gauge (All Ranges) A=Absolute (All Ranges)	V=10 Vdc	PC=Pin Connection RC=Ribbon Cable
		015 030 050 100 200 300 500	P=psi			

Part Number Example: MIOF-19C P8 050PA RC
Supply Voltage, Ribbon Cable

0-50PSI Absolute, Euro O-Ring Mount Pressure Port, 10Vdc

WARRANTY

Pressure sensors have a limited one-year warranty to the original purchaser. AVSensors will repair or replace, at its option, without charge those items it finds defective. This is the buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall AVSensors be liable for consequential, special, or indirect damages. This warranty does not apply to units that have been modified, misused, neglected or installed where the application exceeds published ratings. Specifications may change without notice. The information supplied is believed to be accurate and reliable as of this printing, however, we assume no responsibility for its use.